



CLEAR PVC TUBING

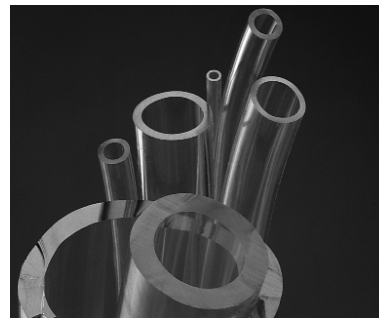

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Working PSI at 70°F	Burst PSI at 70°F
IR-14000	1/16	1/8	1/32	33	132
IR-14002	3/32	5/32	1/32	42	168
IR-14004	1/8	3/16	1/32	44	176
IR-14006	1/8	1/4	1/16	68	272
IR-14008	5/32	11/32	3/32	73	292
IR-14010	1/16	3/16	1/32	33	132
IR-14012	3/16	5/16	1/16	55	220
IR-14014	3/16	3/8	3/32	70	280
IR-14018	1/4	3/8	1/16	55	220
IR-14020	1/4	7/16	3/32	60	240
IR-14024	1/4	1/2	1/8	70	280
IR-14028	5/16	7/16	1/16	50	200
IR-14030	5/16	1/2	3/32	60	240
IR-14032	5/16	9/16	1/8	70	280
IR-14036	3/8	1/2	1/16	40	160
IR-14038	3/8	9/16	3/32	50	200
IR-14040	3/8	5/8	1/8	65	260
IR-14042	3/8	3/4	3/16	66	264
IR-14046	7/16	11/16	1/8	50	200
IR-14050	1/2	5/8	1/16	30	120
IR-14052	1/2	11/16	3/32	40	160
IR-14054	1/2	3/4	1/8	45	180
IR-14056	1/2	1"	1/4	66	264
IR-14060	9/16	3/4	3/32	40	160
IR-14064	5/8	3/4	1/16	48	192
IR-14066	5/8	13/16	3/32	35	140
IR-14068	5/8	7/8	1/8	40	100
IR-14070	5/8	15/16	5/32	50	200
IR-14072	5/8	1"	3/16	49	196
IR-14076	11/16	1"	5/32	40	160
IR-14080	3/4	7/8	1/16	19	76
IR-14082	3/4	1"	1/8	35	140
IR-14084	3/4	1-1/16"	5/32	40	160
IR-14086	3/4	1-1/8"	3/16	44	176
IR-14088	3/4	1-1/4"	1/4	44	176
IR-14092	7/8	1-1/8"	1/8	30	120
IR-14096	1"	1-1/4"	1/8	28	112
IR-14098	1"	1-5/16"	5/32	32	128
IR-14100	1"	1-3/8"	3/16	45	180
IR-14102	1"	1-1/2"	1/4	50	200

- Manufactured from non-toxic ingredients conforming to FDA and USDA standards
- **ProFLO®** Clear PVC compound meets the requirements of USP class VI
- Glass-like clarity with smooth surface provides outstanding flow characteristics
- Does not impart taste or odor
- Flexible, lightweight, yet tough and abrasion resistant
- Suitable for a wide variety of chemicals, gases, and liquids
- **ProFLO®** Clear PVC tubing may be autoclaved at 20 lbs. steam for 20 minutes

Hardness, Shore A:	68 ± 5
Tensile Strength:	2000 psi
Elongation at Break:	400%
Brittle Temperature:	-40°F
Maximum Operating Temperature:	175°F

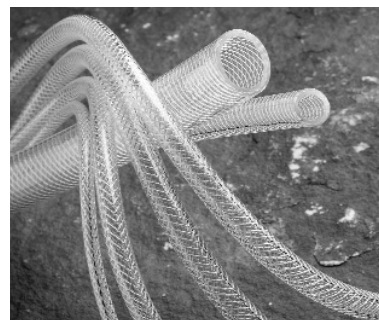

CLEAR BRAIDED REINFORCED PVC HOSE

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Working PSI at 70°F	Burst PSI at 70°F
IR-14120	0.125	0.315	0.095	465	1395
IR-14124	0.187	0.395	0.104	315	945
IR-14126	0.250	0.436	0.093	315	945
IR-14128	0.250	0.454	0.102	300	900
IR-14130	0.250	0.500	0.125	400	1200
IR-14134	0.312	0.532	0.110	280	840
IR-14138	0.375	0.575	0.100	215	645
IR-14140	0.375	0.600	0.112	230	690
IR-14142	0.375	0.625	0.125	265	795
IR-14146	0.500	0.710	0.167	190	570
IR-14148	0.500	0.728	0.114	215	645
IR-14150	0.500	0.850	0.175	255	770
IR-14154	0.625	0.906	0.140	200	600
IR-14158	0.750	1.024	0.137	150	450
IR-14160	0.750	1.125	0.187	230	695
IR-14164	1.000	1.300	0.150	130	390
IR-14166	1.000	1.375	0.187	185	555

- Open mesh polyester braid encapsulated between walls of Clear **ProFLO®** Tubing to become a single hose
- Provides higher-pressure values than unreinforced **ProFLO®** Clear PVC tubing
- Smooth interior permits excellent flow characteristics
- Manufactured from NON-TOXIC ingredients conforming to FDA standards
- Does not impart taste or odor
- Suitable for a wide variety of chemicals, gases, and liquids

Hardness, Shore A:	80 ± 5
Tensile Strength:	2500 psi
Elongation at Break:	320%
Brittle Temperature:	-50°F
Maximum Operating Temperature:	175°F