


CLEAR POLYURETHANE TUBING (ETHER-BASED)

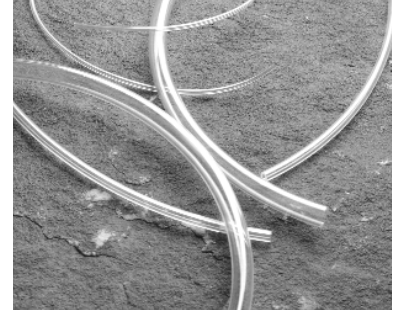


| ICO RALLY Part Number | Inside Diameter | Outside Diameter | Wall Thickness | Standard Lengths | Working PSI at 70°F | Burst PSI at 70°F |
|-----------------------|-----------------|------------------|----------------|------------------|---------------------|-------------------|
| IR-14180 | 1/16 | 1/8 | 1/32 | 100', 500' | 130 | 400 |
| IR-14186 | 1/8 | 3/16 | 1/32 | 100', 500' | 70 | 215 |
| IR-14188 | 1/8 | 1/4 | 1/16 | 100', 500' | 130 | 390 |
| IR-14192 | 3/16 | 5/16 | 1/16 | 100', 500' | 70 | 220 |
| IR-14196 | 1/4 | 5/16 | 1/32 | 100' | 30 | 95 |
| IR-14198 | 1/4 | 3/8 | 1/16 | 100', 500' | 65 | 220 |
| IR-14200 | 1/4 | 1/2 | 1/8 | 100', 500' | 130 | 390 |
| IR-14204 | 5/16 | 7/16 | 1/16 | 100' | 65 | 195 |
| IR-14208 | 3/8 | 1/2 | 1/16 | 100', 500' | 55 | 175 |
| IR-14210 | 3/8 | 9/16 | 3/32 | 100' | 80 | 250 |
| IR-14212 | 3/8 | 5/8 | 1/8 | 100' | 100 | 300 |
| IR-14216 | 1/2 | 5/8 | 1/16 | 50', 100' | 35 | 105 |
| IR-14218 | 1/2 | 11/16 | 3/32 | 50', 100' | 45 | 140 |
| IR-14220 | 1/2 | 3/4 | 1/8 | 50', 100' | 60 | 180 |
| IR-14224 | 5/8 | 3/4 | 1/16 | 50', 100' | 40 | 120 |
| IR-14226 | 5/8 | 13/16 | 3/32 | 50', 100' | 50 | 160 |
| IR-14228 | 5/8 | 7/8 | 1/8 | 50', 100' | 60 | 180 |
| IR-14232 | 3/4 | 1" | 1/8 | 50', 100' | 50 | 150 |
| IR-14236 | 7/8 | 1-1/8" | 1/8 | 50', 100' | 30 | 95 |
| IR-14240 | 1" | 1-1/4" | 1/8 | 50', 100' | 40 | 120 |

- Flexible, resilient, abrasion resistant; resistant to weathering and radiation
- Suitable for a wide variety of liquids, oils, grease, and fuels
- Contains no plasticizer which can cause flow contamination or tube hardening
- Does not impart taste or odor

| | |
|--------------------------------|----------|
| Hardness, Shore A: | 85 ± 5 |
| Tensile Strength: | 5500 psi |
| Elongation at Break: | 580% |
| Brittle Temperature: | -90°F |
| Maximum Operating Temperature: | 200°F |

CLEAR POLYURETHANE BRAIDED REINFORCED HOSE (ETHER-BASED)

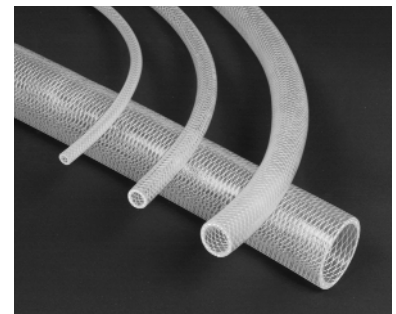

| ICO RALLY Part Number | Inside Diameter | Outside Diameter | Wall Thickness | Standard Lengths | Working PSI at 70°F | Burst PSI at 70°F |
|-----------------------|-----------------|------------------|----------------|------------------|---------------------|-------------------|
| IR-14250 | 0.250 | 0.470 | 0.110 | 100' | 250 | 1000 |
| IR-14256 | 0.375 | 0.630 | 0.127 | 100' | 190 | 760 |
| IR-14262 | 0.500 | 0.750 | 0.125 | 100' | 150 | 600 |
| IR-14266 | 0.625 | 0.905 | 0.140 | 100' | 130 | 520 |
| IR-14270 | 0.750 | 1.025 | 0.137 | 100' | 100 | 400 |
| IR-14274 | 1.000 | 1.300 | 0.150 | 100' | 80 | 320 |
| IR-14278 | 1.250 | 1.710 | 0.230 | 100' | 75 | 300 |
| IR-14282 | 1.500 | 1.930 | 0.215 | 100' | 50 | 200 |
| IR-14286 | 2.000 | 2.500 | 0.250 | 100' | 40 | 160 |

- Polyester braiding within the wall of flexible clear polyurethane hose
- Offers greater working and burst pressures than unreinforced polyurethane
- Flexible, resilient, abrasion resistant; resistant to weathering and radiation
- Suitable for a wide variety of liquids, oils, grease, and fuels
- Contains no plasticizer which can cause flow contamination or hose hardening

| | |
|--------------------------------|----------|
| Hardness, Shore A: | 85 ± 5 |
| Tensile Strength: | 5500 psi |
| Elongation at Break: | 580% |
| Brittle Temperature: | -90°F |
| Maximum Operating Temperature: | 200°F |