


ROUND VINYL CAPS

**VINYL
CAPS**

Round Vinyl Caps are used for a variety of applications including color coding, dust barriers, insulators, thread protectors, paint masking, and cosmetic decoration. They are resistant to weather, moisture, oxidation and petroleum products. In addition, they will not shred, crack, or split in normal applications.

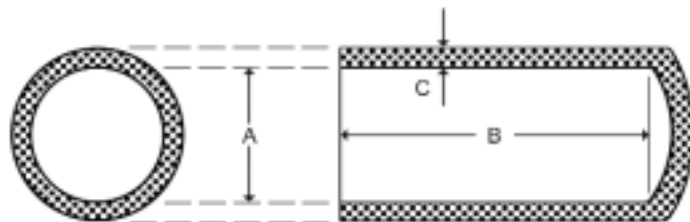


| Catalog Number | Dimensions | | | | | | Standard Color |
|----------------|------------|------|--------|-------|--------|------|----------------|
| | A | | B | | C | | |
| | inches | mm | inches | mm | inches | mm | |
| 3544 | 0.137 | 3.48 | 0.500 | 12.70 | 0.033 | 0.84 | Black |
| 3545 | 0.187 | 4.75 | 0.500 | 12.70 | 0.038 | 0.97 | White |
| 3546 | 0.250 | 6.35 | 0.625 | 15.88 | 0.043 | 1.09 | Red |
| 3547 | 0.313 | 7.95 | 0.625 | 15.88 | 0.043 | 1.09 | Blue |
| 3548 | 0.375 | 9.53 | 0.750 | 19.05 | 0.043 | 1.09 | Yellow |

Additional sizes and colors available subject to minimum order quantities.

VINYL GROMMETS

GV

Vinyl Grommets are inexpensive, flexible, and oil resistant. They have a high dielectric strength and outstanding aging qualities. The standard color is black.

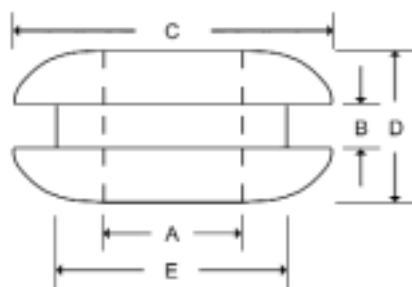

Hardness Durometer: 60 +/- 5 Shore A
 Tensile Strength: 1400 psi
 Abrasive Resistance: Excellent
 Effect of Sunlight: Slight to None
 Hydro Carbon Solvent Resistance: Good
 Weak Acid Resistance: No Effect
 Burning Rate: Self Extinguishing

| Polyethylene Catalog Number Size | Dimensions | | | | | | | | | | Standard Package pcs / pkg |
|----------------------------------|------------|-------|--------|------|--------|-------|--------|-------|--------|-------|----------------------------|
| | A | | B | | C | | D | | E | | |
| | inches | mm | inches | mm | inches | mm | inches | mm | inches | mm | |
| GV-1/4 | 0.125 | 3.18 | 0.063 | 1.60 | 0.344 | 8.74 | 0.188 | 4.78 | 0.250 | 6.35 | 100, 1000 |
| GV-5/16 | 0.188 | 4.78 | 0.063 | 1.60 | 0.438 | 11.13 | 0.219 | 5.56 | 0.313 | 7.95 | 100, 1000 |
| GV-3/8 | 0.250 | 6.35 | 0.063 | 1.60 | 0.563 | 14.30 | 0.250 | 6.35 | 0.375 | 9.53 | 100, 1000 |
| GV-7/16 | 0.313 | 7.95 | 0.063 | 1.60 | 0.625 | 15.88 | 0.250 | 6.35 | 0.438 | 11.13 | 100, 1000 |
| GV-1/2 | 0.375 | 9.53 | 0.063 | 1.60 | 0.625 | 15.88 | 0.250 | 6.35 | 0.500 | 12.70 | 100, 1000 |
| GV-5/8 | 0.500 | 12.70 | 0.063 | 1.60 | 0.813 | 20.65 | 0.281 | 7.14 | 0.625 | 15.88 | 100, 500 |
| GV-21/32 | 0.391 | 9.93 | 0.125 | 3.18 | 0.844 | 21.44 | 0.375 | 9.53 | 0.656 | 16.66 | 100, 500 |
| GV-7/8 | 0.625 | 15.88 | 0.063 | 1.60 | 1.125 | 28.58 | 0.281 | 7.14 | 0.875 | 22.23 | 100, 500 |
| GV-1 | 0.688 | 17.48 | 0.063 | 1.60 | 1.313 | 33.35 | 0.375 | 9.53 | 1.000 | 25.40 | 100, 500 |
| GV-1-3/8 | 1.000 | 25.40 | 0.125 | 3.18 | 1.750 | 44.45 | 0.500 | 12.70 | 1.375 | 34.93 | 100, 250 |